





PIAF 810

**Mast-style boom
lift on tracks**

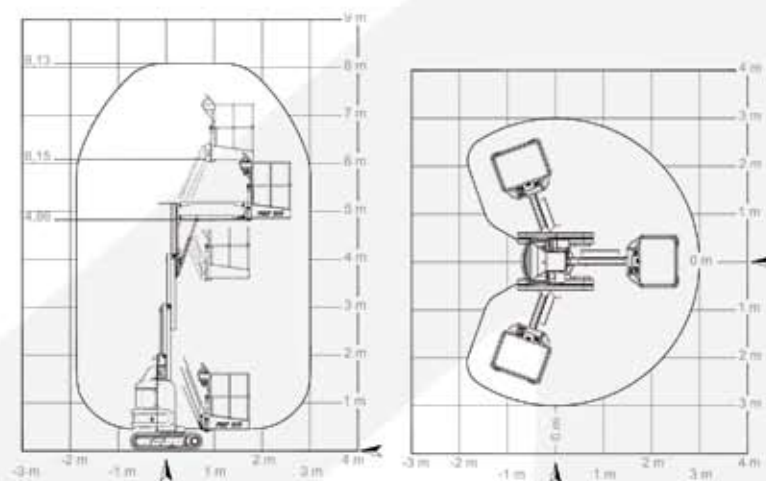

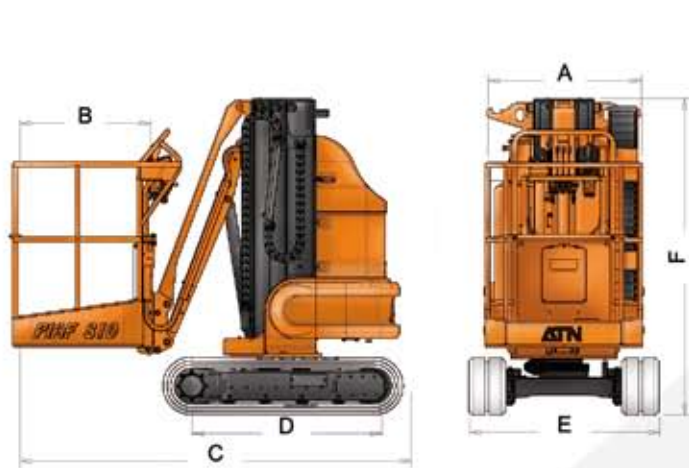

PIAF 810 on tracks

ADVANTAGES

- Efficiency thanks to the 2 x 110° rotation of the top.
- Designed for any indoor or outdoor job site.
- Smooth operating thanks to the hydraulic joystick.
- Easy to operate.
- Zero turning radius.
- Preserving fragile floors.
- Designed and manufactured for heavy-duty use.

STANDARD FEATURES

- Non-marking rubber tracks.
- Progressive hydraulic joystick transmission.
- Driving operated by a hydraulic joystick.
- 575 Ah centralized battery filling system.
- 85 A battery charger.
- 2 drive speeds.
- Lifting facilities.
- Emergency hand-pump.
- Battery indicator with 80% discharge cut-off.
- Tilt indicator with buzzer.
- Overload sensor.
- System preventing from tipping over.
- Hour meter.
- Strong large size platform.

OPTIONS

- Air line to platform.
- 220V AC power to platform.
- Automatic power cut-off if tilt value >5°.
- Special paint colour(s).



This product complies with European regulations in force(EN 280).
Due to our constant improvement policy,
ATN reserves the right to make any modifications
without any prior notice.



6, impasse ZI de Suriray n°2 - 47400 Tonneins - FRANCE
Tel. : + 33 553 761 235 - Fax : + 33 553 880 107
e-mail : contact@atnplatforms.com

| | 810 |
|--------------------|--------------------------|
| Working height | 8,10 m (26 ft. 6,91 in.) |
| Platform height | 6,10 m (20 ft. 0,16 in.) |
| Horizontal reach | 3,00 m (9 ft. 10,11 in.) |
| Lift capacity | 200 kg (441 lbs.) |
| Turntable rotation | 2 x 110° |
| A Platform width | 0,90 m (2 ft. 9,5 in.) |
| B Platform length | 0,80 m (2 ft. 6,2 in.) |
| C Length - stowed | 2,47 m (8 ft. 10,25 in.) |
| D Trackbase | 1,20 m (3 ft. 11,24 in.) |
| E Width | 1,20 m (3 ft. 11,24 in.) |
| F Height - stowed | 1,98 m (6 ft. 6,49 in.) |
| Turning radius | zero |

| | |
|-----------------------------|--|
| Gradeability | 30% |
| Maximum tilt value | 5° |
| Drive speed - stowed | 1,8 km/h (1,12 mph) |
| Drive speed - raised | 0,8 km/h (0,50 mph) |
| Weight | 2200 kg (4851 lbs) |
| Max.ground bearing pressure | 0,5 kg / cm ² (7 psi / in. ²) |

